



AVAILABLE OPTIONS

- Defogger
- Dimming 0-10V
- Touch Sensor
- Motion Sensor
- USB Charger
- Bluetooth (Audio)
- Magnifying Mirror X3 & X5
- LED Digital Clock
- Night Light
- Power Outlet
- Power Plug

* See "Options" page for more information.

LIGHTING SPECIFICATIONS

- Easy replaceable LEDs
- CCT: 3000 | 4000 | 6000
- 366 Lumens per foot*
* Higher Lumen per foot available
- CRI: 80 +
- LED Life: Average 90,000 hrs.



Frosted area with
Fingerprint-free technology



Intertek



Special anti-corrosion
Mirror treatment




5mm Environmental
Copper free silver Mirror

FEATURES

- Soft closing hinges
- Frosted area with fingerprint-free technology
- Special anti-corrosion Mirror treatment
- Suitable for Damp Location
- 5mm Environmental Copper free silver Mirror
- Easy installation
- Custom Mirror dimensions available

INSTALLATION



ORDERING CODE


LM-1107-LED - _____ - _____ - _____ - _____ - _____ - _____

Product ID	Dimensions	Voltage	CCT	Diffuser	Mounting	Options
LM-1107-LED	2030 - 20"W x 30"H	120 - 120V	30 - 3000k	FR - Frosted	SM - Surface Mounting	DF - Defogger
	2430 - 24"W x 30"H	277 - 277V	40 - 4000k	IF - Ice Frost	RM - Recessed Mounting	DM - Dimming 0-10V
	2436 - 24"W x 36"H		60 - 6000k	*C - *Custom		TS - Touch Sensor
	2440 - 24"W x 40"H			<small>*Consult factory</small>		MS - Motion Sensor
	C - Custom					BT - Bluetooth (Audio)
						M3 - Magnifying Mirror x3
						M5 - Magnifying Mirror x5
						LD - LED Digital Clock
						USB - USB Charger
						TNL - Top Night Light
						BNL - Bottom Night Light
						INL - Inside Night Light
						PO - Power Outlet
						PP - Power Plug

LIGHTING SPECIFICATIONS

Standard Product: Hardwired

Dimensions Recessed	Dimensions Surface	Wattage	Lumen Output	CRI
20"W x 30"H x .75"D	20"W x 30"H x 5"D	17 Watt	1685 Total Lumen Output	80+ CRI
24"W x 30"H x .75"D	24"W x 30"H x 5"D	17 Watt	1685 Total Lumen Output	80+ CRI
24"W x 36"H x .75"D	24"W x 36"H x 5"D	21 Watt	2051 Total Lumen Output	80+ CRI
24"W x 40"H x .75"D	24"W x 40"H x 5"D	23 Watt	2294 Total Lumen Output	80+ CRI

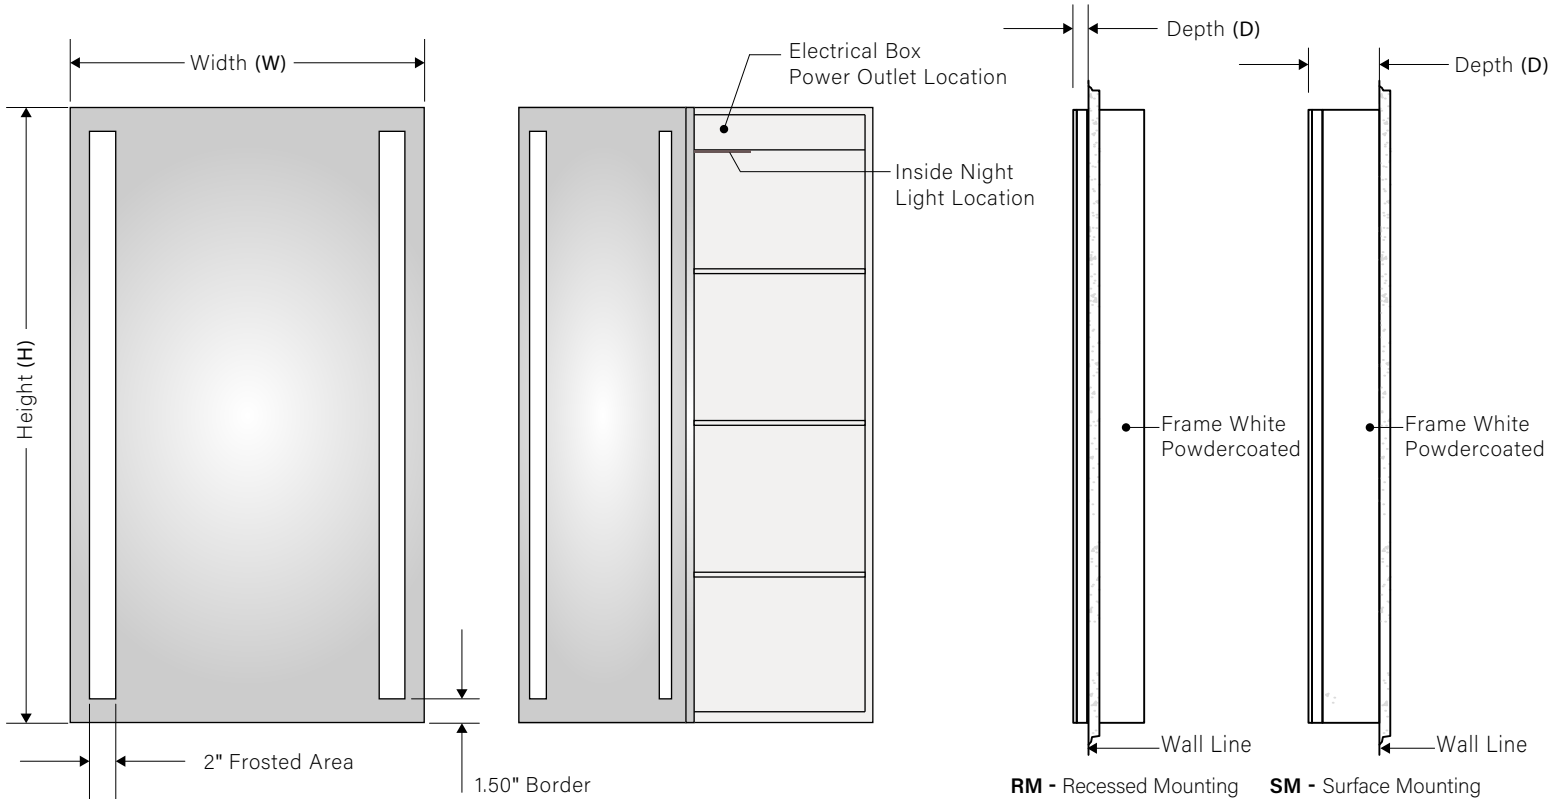


* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____

MOUNTING

SM - Surface Mounting

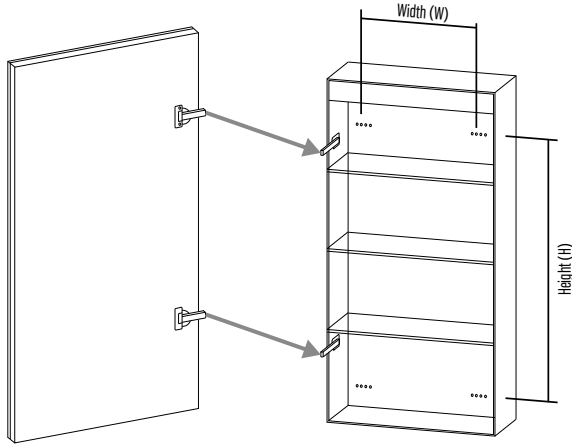

Back View Mirror

Front View Frame


Mirror Dimensions

Mounting Dimensions

20"W x 30"H x 5"D
24"W x 30"H x 5"D
24"W x 36"H x 5"D
24"W x 40"H x 5"D

W = 15.30"	H = 20.60"
W = 19.30"	H = 20.60"
W = 19.30"	H = 26.60"
W = 19.30"	H = 30.60"

RM - Recessed Mounting

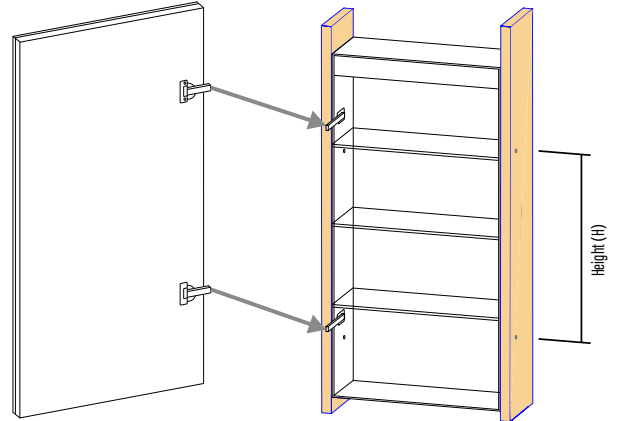

Back View Mirror

Mirror Dimensions

Mounting Dimensions

20"W x 30"H x .75"D
24"W x 30"H x .75"D
24"W x 36"H x .75"D
24"W x 40"H x .75"D

H = 17.40"
H = 17.40"
H = 23.40"
H = 27.40"

DIFFUSER



FROSTED



ICE FROST

Frosted area with fingerprint-free technology
 Special anti-corrosion Mirror treatment
 5mm Environmental Copper free silver Mirror



DF - Defogger

Electrical defogger heated pad system will help you remove the steam from the Mirror.



DM - Dimming

0-10V dimming available on all our mirrors.



TS - Touch Sensor

Innovative and attractive touch sensor with an LED night light.



MS- Motion Sensor

Placed on the side or bottom, simply wave your hands to turn on or off.



BT - Bluetooth (Audio)

Bluetooth speaker that will connect to your phone or tablet to play your favorite music.



M3 - Magnifying Mirror x3 / **M5** - Magnifying Mirror x5

3X or 5X magnifying mirror with an LED ring around.



LD - LED Digital Clock

Screen with an LED clock.



USB - USB Charger

Placed on the bottom or the side, 5V USB port available to charge any phone or tablet.



NL - Night Light

Night light available for top, bottom, inside or all together.



PO - Power Outlet

Power Outlet located at the bottom or the sides.



PP - Power Plug

Power Plug available on all Mirrors, and can be located in any desired location.