

ORDERING CODE

SLIM

Product ID	Length	Voltage	CCT	Mounting	Finish	Option
SLIM - Slim LED	3 - 3FT	120 - 120V	30 - 3000k	AC - Drywall + Aircraft cable (36" std)	W - White	D10 - 0-10V Dimmable
	4 - 4FT	277 - 277V	40 - 4000k	ACT - T-Bar + Aircraft cable (36" std)	B - Black	DA - Dali Dimmable
	5 - 5FT		60 - 6000k		S - Anodized	UP - Up Light
	C - Continuous Run				C - Custom	

CONNECTIONS

Please specify number of connections

Connections


ST - Straight 60 - 60 Degree 90 - 90 Degree

Connections


135 -135 Degree 150 - 150 Degree

LIGHTING SPECIFICATIONS

Dimensions	Wattage	Lumen Output
3' x 0.75" W x 3.75"H	30 Watt	2700 Nominal Lumen Output
4' x 0.75" W x 3.75"H	40 Watt	3600 Nominal Lumen Output
5' x 0.75" W x 3.75"H	48 Watt	4320 Nominal Lumen Output

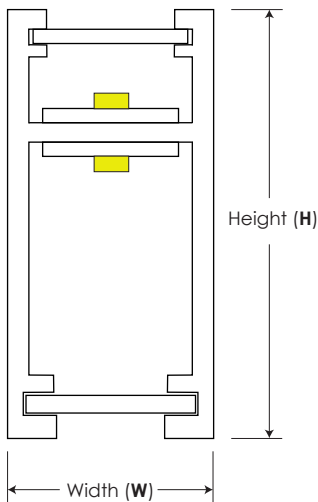

* Not to Scale.

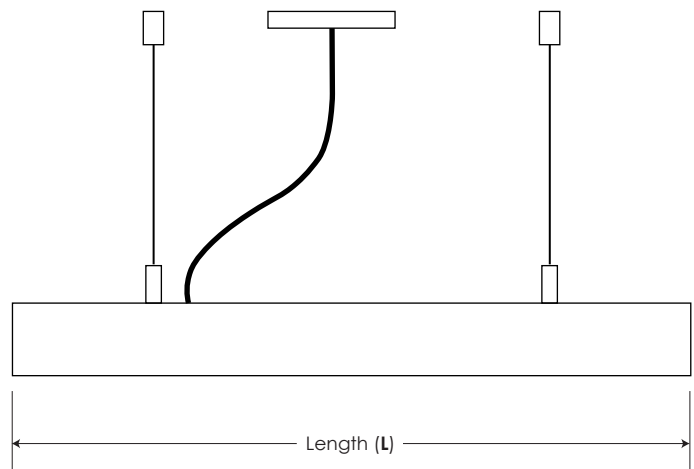

APPROVED BY: _____

SIGNATURE: _____



DATE: _____

CONNECTIONS



Straight

90 Degree

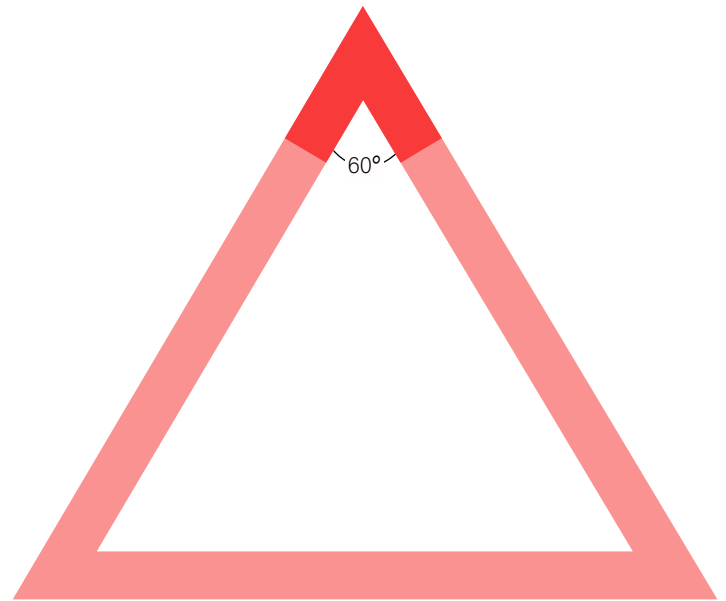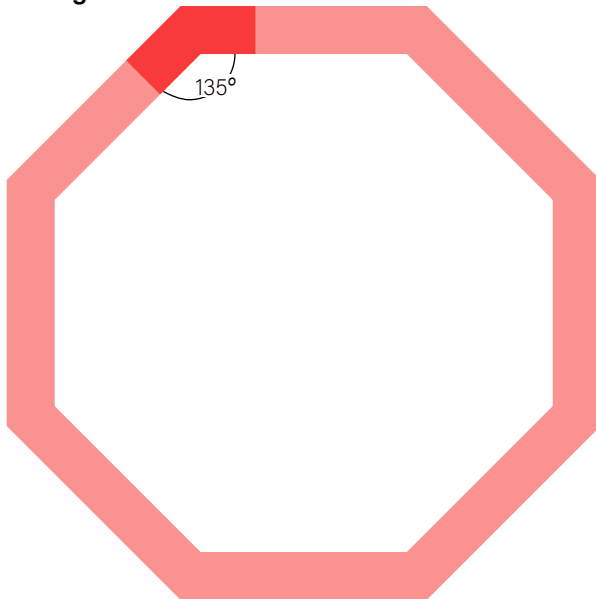


135 Degree



Easy assembly corner connection.
Fully illuminated corner.

60 Degree

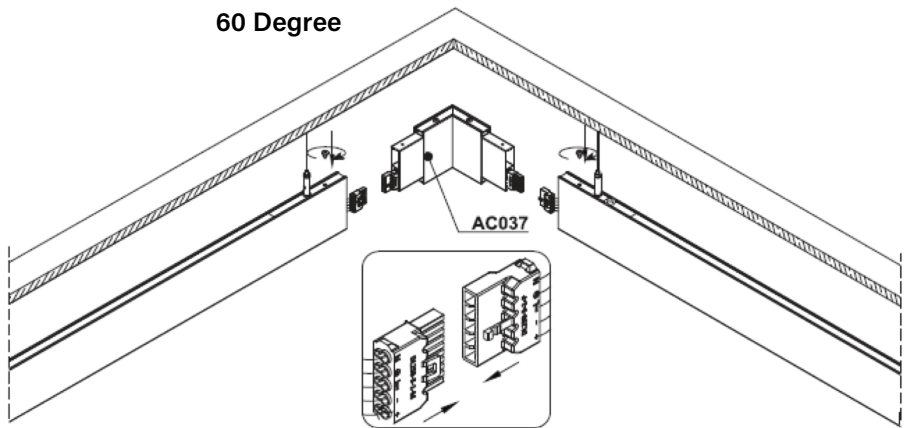

FOR YOUR SKETCH

