

ORDERING CODE


LM-1106-LED - _____ - _____ - _____ - _____ - _____ - _____

Product ID	Dimensions	Voltage	CCT	Diffuser	Mounting	Options
LM-1106-LED	2030 - 20"W x 30"H	120 - 120V	30 - 3000k	FR - Frosted	SM - Surface Mounting	DF - Defogger
	2430 - 24"W x 30"H	277 - 277V	40 - 4000k	IF - Ice Frost	RM - Recessed Mounting	DM - Dimming 0-10V
	2436 - 24"W x 36"H		60 - 6000k	*C - *Custom		TS - Touch Sensor
	2440 - 24"W x 40"H			*Consult factory		MS - Motion Sensor
	C - Custom					BT - Bluetooth (Audio)
						M3 - Magnifying Mirror x3
						M5 - Magnifying Mirror x5
						LD - LED Digital Clock
						USB - USB Charger
						TNL - Top Night Light
						BNL - Bottom Night Light
						INL - Inside Night Light
						PO - Power Outlet
						PP - Power Plug

LIGHTING SPECIFICATIONS

Standard Product: Hardwired

Dimensions Recessed	Dimensions Surface	Wattage	Lumen Output	CRI
20"W x 30"H x .75"D	20"W x 30"H x 5"D	28 Watt	2760 Total Lumen Output	80+ CRI
24"W x 30"H x .75"D	24"W x 30"H x 5"D	30 Watt	3004 Total Lumen Output	80+ CRI
24"W x 36"H x .75"D	24"W x 36"H x 5"D	34 Watt	3370 Total Lumen Output	80+ CRI
24"W x 40"H x .75"D	24"W x 40"H x 5"D	36 Watt	3613 Total Lumen Output	80+ CRI

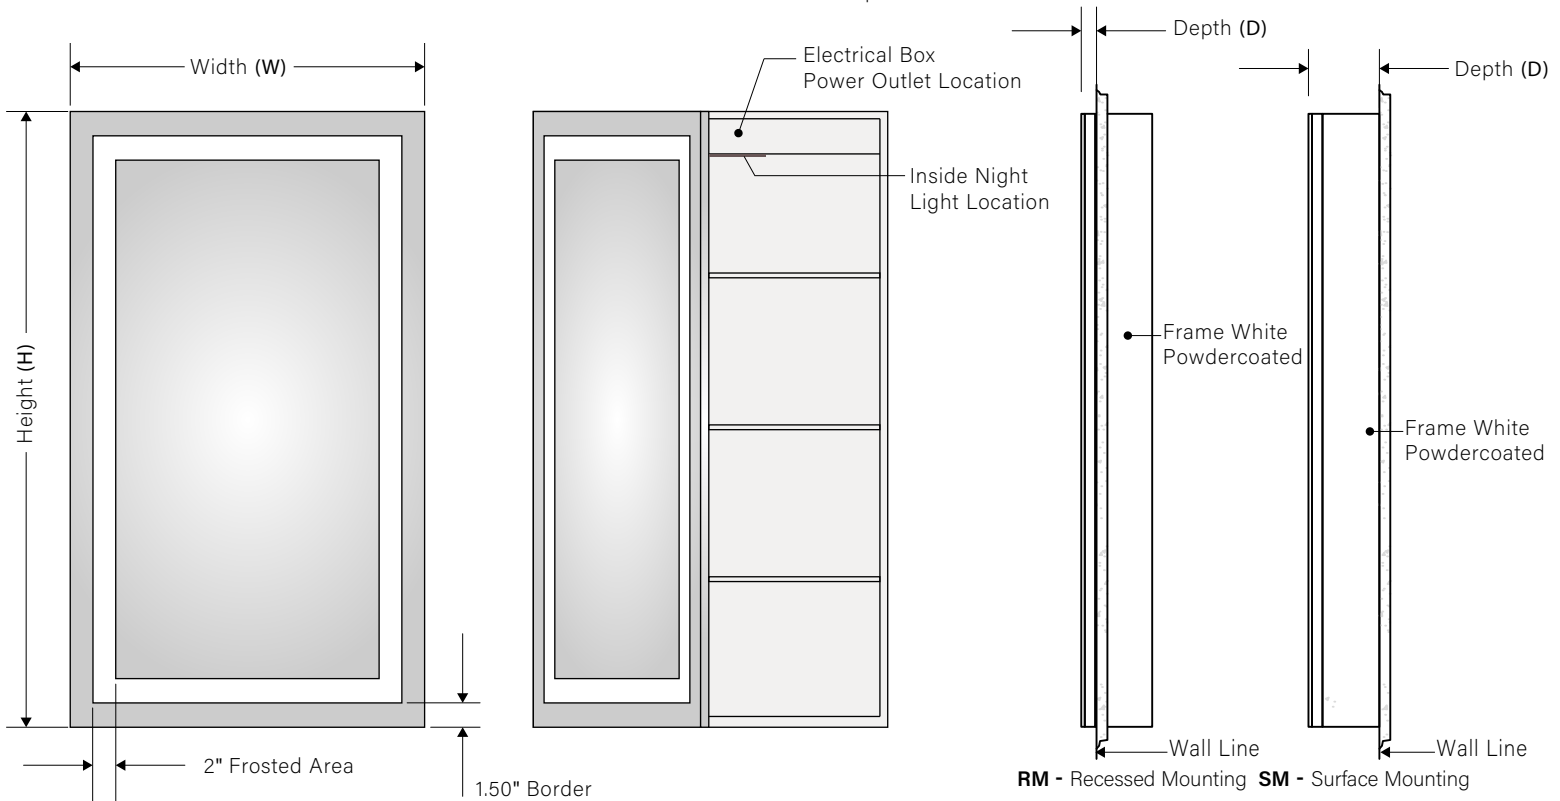

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____