



ORDERING CODE


LM-1114-LED - _____ - _____ - _____ - FR - _____ - _____ - _____

Product ID	Dimensions	Voltage	CCT	Diffuser	Installation	Mounting	Options
LM-1114-LED	30 - 30"W x 30"H	120 - 120V	30 - 3000k	FR - Frosted	HR - Horizontal VT - Vertical  	CM - Cleats Mounting* KM - Keyhole Mounting** <small>* Frame White Powdercoated</small> <small>** Frame Satin Aluminum</small>	DF - Defogger DM - Dimming 0-10V TS - Touch Sensor MS - Motion Sensor BT - Bluetooth (Audio)* M3 - Magnifying Mirror x3 M5 - Magnifying Mirror x5 LD - LED Digital Clock USB - USB Charger TNL - Top Night Light BNL - Bottom Night Light PO - Power Outlet* PP - Power Plug <small>* Mirror depth to be 3"D</small>
	36 - 36"W x 36"H	277 - 277V	40 - 4000k				
	40 - 40"W x 40"H		60 - 6000k				
	48 - 48"W x 48"H						
	C - Custom						

LIGHTING SPECIFICATIONS

Standard Product: Hardwired

Dimensions	Wattage	Lumen Output	CRI
30"W x 30"H x 2"D	19 Watt	1854 Total Lumen Output	80+ CRI
36"W x 36"H x 2"D	23 Watt	2280 Total Lumen Output	80+ CRI
40"W x 40"H x 2"D	26 Watt	2565 Total Lumen Output	80+ CRI
48"W x 48"H x 2"D	31 Watt	3134 Total Lumen Output	80+ CRI

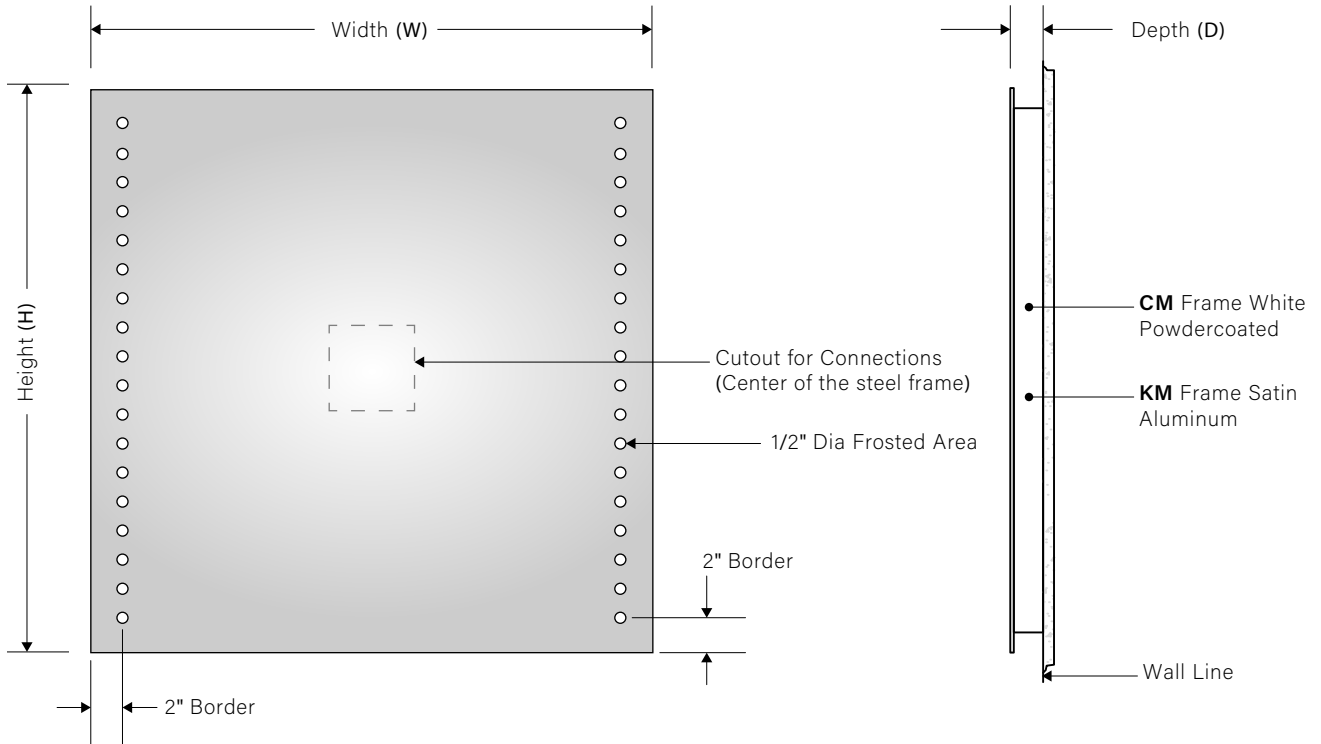

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____

File: LM - 1114 - SPEC - REV2 Date: 07 March 2019 Page: 2/4