


ORDERING CODE


Product ID	Dimensions	Voltage	CCT	Diffuser	Installation	Mounting	Options
LM-1120A-LED	24 - 6"W x 24"H	120 - 120V	30 - 3000k	FR - Frosted	HR - Horizontal	CM - Cleats Mounting*	DF - Defogger
LM-1120B-LED	36 - 6"W x 36"H	277 - 277V	40 - 4000k	IF - Ice Frost	VT - Vertical	KM - Keyhole Mounting**	DM - Dimming 0-10V
LM-1120C-LED	48 - 6"W x 48"H		60 - 6000k	C - Custom*		* Frame White Powdercoated	PP - Power Plug
LM-1120D-LED	60 - 6"W x 60"H			*Consult factory		** Frame Satin Aluminum	
LM-1120E-LED	C - Custom						
LM-1120F-LED							



LIGHTING SPECIFICATIONS

Standard Product: Hardwired

Dimensions	Wattage	Lumen Output	CRI
6"W x 24"H x 2"D	7 Watt	713 Total Lumen Output	80+ CRI
6"W x 36"H x 2"D	11 Watt	1140 Total Lumen Output	80+ CRI
6"W x 48"H x 2"D	16 Watt	1567 Total Lumen Output	80+ CRI
6"W x 60"H x 2"D	20 Watt	1994 Total Lumen Output	80+ CRI

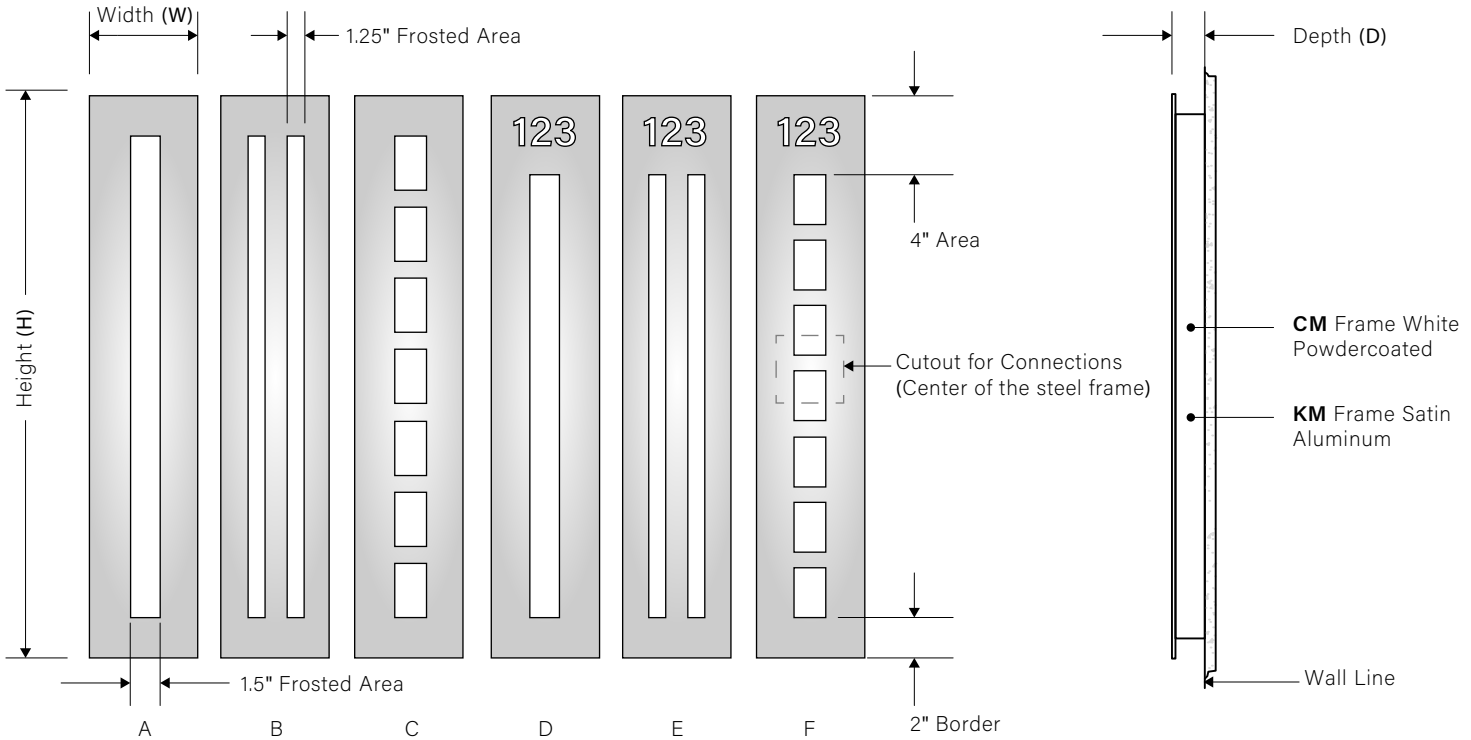

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____