



ORDERING CODE


LM-1122-LED - _____ - _____ - _____ - _____ - _____ - _____ - _____

Product ID	Dimensions	Voltage	CCT	Diffuser	Installation	Mounting	Options
LM-1122-LED	22 - 22"W x 32"H 24 - 24"W x 36"H 36 - 36"W x 48"H 48 - 48"W x 60"H C - Custom	120 - 120V 277 - 277V	30 - 3000k 40 - 4000k 60 - 6000k	FR - Frosted IF - Ice Frost C - Custom* <small>*Consult factory</small>	HR - Horizontal VT - Vertical   HR VT	CM - Cleats Mounting* KM - Keyhole Mounting** <small>* Frame White Powdercoated ** Frame Satin Aluminum</small>	DF - Defogger DM - Dimming 0-10V TS - Touch Sensor MS - Motion Sensor BT - Bluetooth (Audio)* M3 - Magnifying Mirror x3 M5 - Magnifying Mirror x5 LD - LED Digital Clock USB - USB Charger TNL - Top Night Light BNL - Bottom Night Light PO - Power Outlet* PP - Power Plug <small>* Mirror depth to be 3"D</small>

LIGHTING SPECIFICATIONS

Dimensions	Wattage	Lumen Output	CRI
22"W x 32"H x 2"D	32 Watt	3168 Total Lumen Output	80+ CRI
24"W x 36"H x 2"D	36 Watt	3595 Total Lumen Output	80+ CRI
36"W x 48"H x 2"D	53 Watt	5302 Total Lumen Output	80+ CRI
48"W x 60"H x 2"D	70 Watt	7009 Total Lumen Output	80+ CRI

Standard Product: Hardwired

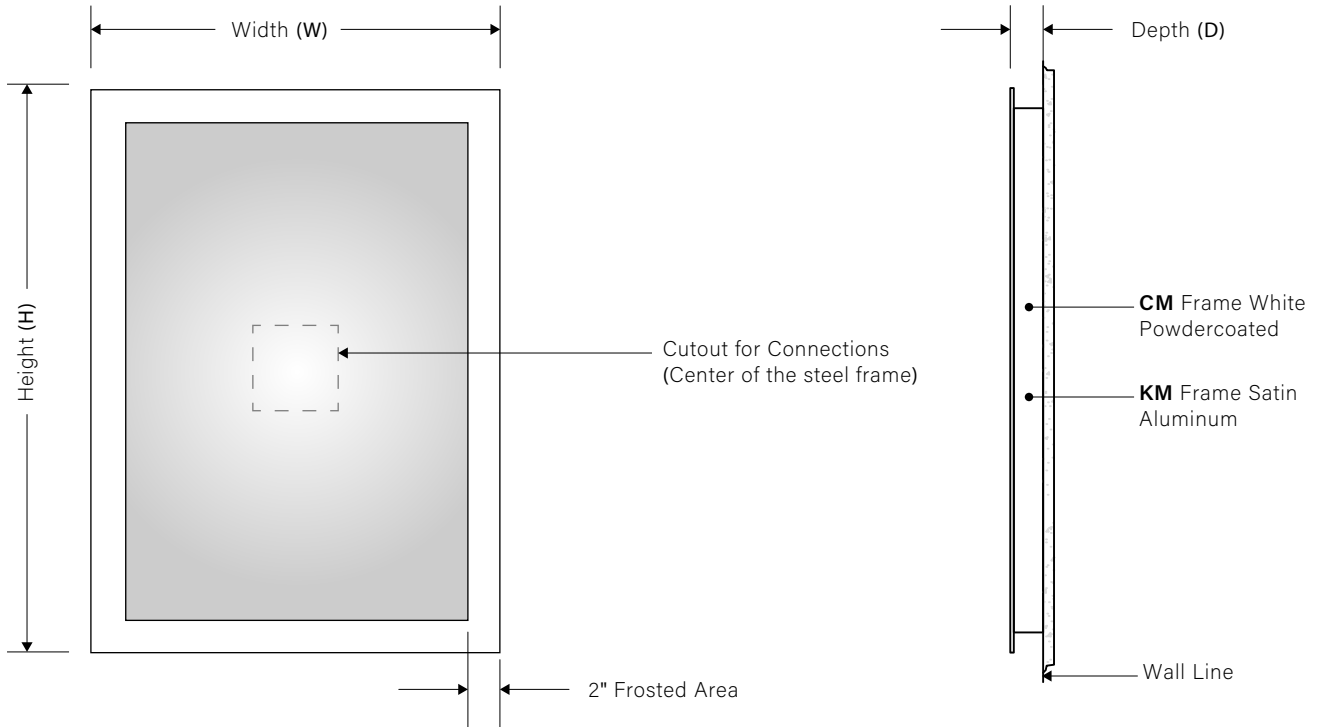

* Not to Scale. Frosted area and border width may change depending on Mirror dimensions.

APPROVED BY: _____ SIGNATURE: _____ DATE: _____

File: LM - 1122 - SPEC - REV2 Date: 08 March 2019 Page: 2/4